



Nožní spínače s kovovým krytem

GFS 10/1S


Číslo materiálu: 1048579 (Staré číslo materiálu: 81201001)

Vlastnosti/možnosti

- With protective shield
- Metal enclosure
- High level of stability

- Low pedal height
- Wiring compartment

Rozměry

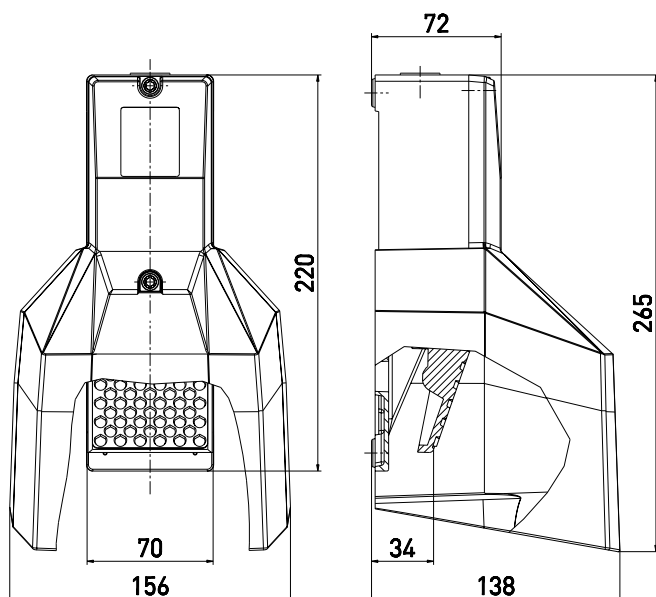

Technická data

Standards

Enclosure

Pedal

Protective shield

Connection

Cable cross-section

Cable entry

Contact material

Degree of protection

Switching system

Switch insert

B_{10d} (10 % Load)

T_M

Utilisation category

I_e/U_e

Max. fuse rating

Ambient temperature

Mechanical life

Approvals

Weight

EN ISO 13849-1; EN 60947-5-1

aluminium die-cast, enamel finish, RAL 5011

glass-fibre reinforced thermoplastic

aluminium die-cast, enamel finish, RAL 5011

screw terminals

max. 2.5 mm²

(incl. conductor ferrules)

1 x M20 x 1.5

silver

IP 65 to IEC/EN 60529

slow action with double break, positive break NC contacts $\ominus$

ES 60 GF

2 million

max. 20 years

AC-15

16 A/400 VAC

16 A gG/gN fuse

-25 °C ... +80 °C

> 1 million operations




1300 g


Spínací diagram

Slow action

1 NC/1 NO contact

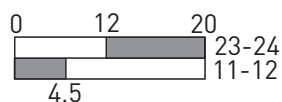

Schéma



Omyly a technické změny vyhrazeny.