



Position switch

EM 14 WR - 2m

Číslo materiálu: 1178413 (Staré číslo materiálu: 14710007)

Vlastnosti/možnosti


- Thermoplastic enclosure
- Double insulated
- Snap action, change-over contact with single break
- Mounting details to EN 50047
- Suitable for in-line mounting

Note

- Actuator can be repositioned by 90° on request

- With pre-wired cable, cable length 2 m
- Actuator: Roller plunger with collar WR
- Actuating speed max. 0.5 m/s with a vertical actuating angle of 25°
- Metal roller
- Watertight collar for protection against penetration of dirt

Rozměry

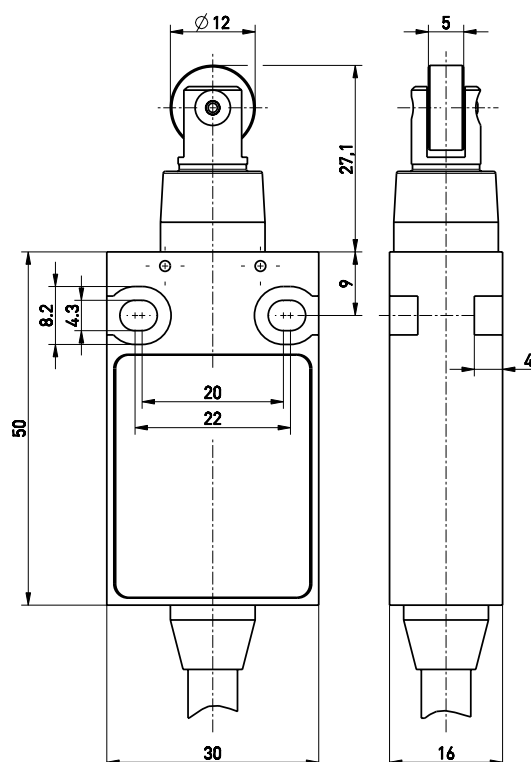


Technická data

Standards	EN 60947-5-1
Enclosure	glass-fibre reinforced, shock-proof thermoplastic, self-extinguishing UL 94-V0
Degree of protection	IP 67 to IEC/EN 60529
Contact material	silver
Switching system	snap action
Switching elements	change-over contact with single break
Connection	pre-wired cable H05VV-F
Cable cross-section	3 x 0.75 mm ²
U _{imp}	4 kV
U _i	250 V
I _{the}	5 A
I _e /U _e	5 A/250 VAC; 0.16 A/230 VDC
Utilisation category	AC-15; DC-13
Max. fuse rating	5 A gG/gN fuse
Ambient temperature	-20 °C ... +75 °C
Mechanical life	> 1 million operations
Frequency of operation	1800/h
Repeat accuracy of switching points	± 0.1 mm
Contact gap	max. 2 x 4 mm
Approvals	
Weight	190 g

Omyly a technické změny vyhrazeny.

Contact diagram



Switching diagram

