



Position switch

EM 14 VR - 5m


Číslo materiálu: 1188915 (Staré číslo materiálu: 14763003)

Vlastnosti/možnosti

- Thermoplastic enclosure
- Double insulated
- Snap action, change-over contact with single break
- Mounting details to EN 50047
- Suitable for in-line mounting

- With pre-wired cable, cable length 5 m
- Actuator: Vertical roller plunger VR
- Actuator can be transposed by 90°
- Wear-resistant plastic roller

Rozměry

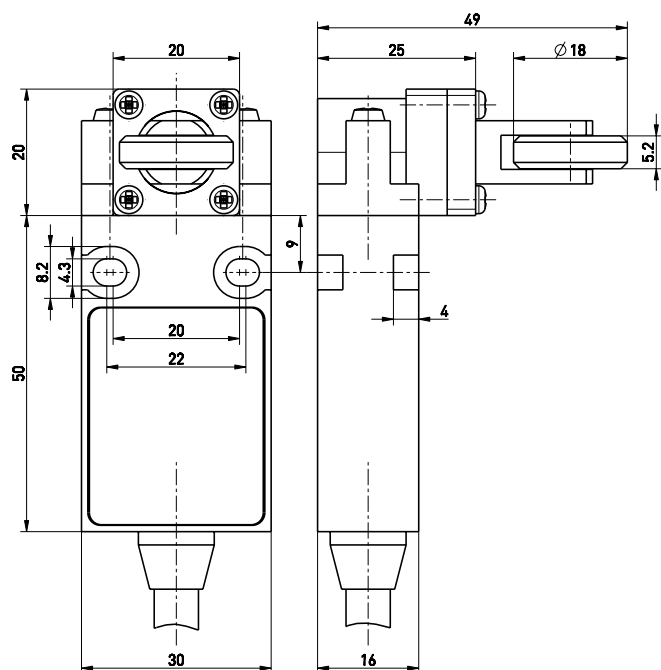

Technická data

Standards

Enclosure

Degree of protection

Contact material

Switching system

Switching elements

Connection

Cable cross-section

U_{imp}

U_i

I_{the}

I_e/U_e

Utilisation category

Max. fuse rating

Ambient temperature

Mechanical life

Frequency of operation

Repeat accuracy of switching

points

Contact gap

Approvals

EN 60947-5-1

glass-fibre reinforced,
shock-proof thermoplastic,
self-extinguishing UL 94-V0
IP 67 to IEC/EN 60529

silver

snap action

change-over contact with single
break

pre-wired cable H05VV-F

3 x 0.75 mm²

4 kV

250 V

5 A

5 A/250 VAC; 0.16 A/230 VDC

AC-15; DC-13

5 A gG/gN fuse

-20 °C ... +75 °C

> 1 million operations


1800/h

± 0.1 mm

max. 2 x 4 mm



Contact diagram



Switching diagram

