

Accessories for security switches


Angled actuator ST 14-B5

Číslo materiálu: 1040841 (Staré číslo materiálu: 04.14.8202)

Vlastnosti/možnosti


- Rubber mounting damps vibrations on guard devices
- Suitable for hinged guards
- Stainless steel 1.4301
- Actuating radius on hinged guards:
Axial misalignment $x = 15$ mm:
a: min. 500 mm, b: min. 1000 mm
Axial misalignment $x = 0$ mm:
a: min. 250 mm, b: min. 600 mm

Rozměry

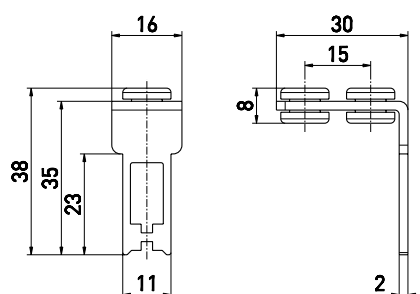

Omyly a technické změny vyhrazeny.

Actuating radii

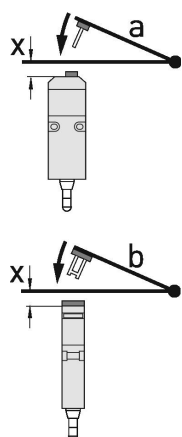

- The axis of the hinge should be x mm above the top edge of the safety switch and in the same plane.
- a Actuating radius to the plane of the actuator
- b Actuating radius in line with the plane of the actuator
- x Axial misalignment

Attention! x must be referred to the surface of the enclosure and not to the inserted actuator!