

Accessories for solenoid interlocks

Flexible actuator AZM 415-B2

Číslo materiálu: 1171890 (Staré číslo materiálu: 01.08.0176)

Vlastnosti/možnosti


- Especially suitable for sliding and hinged guards
- Actuating radius on hinged guards $b = 250 \text{ mm}$
- Axial misalignment $x = 36 \text{ mm}$

Notes

- The actuator is not included in the delivery of the switches
- Removal of the actuator can be prevented by fitting dowel pins in the holes provided.
- The distance between the flange of the actuator and the switch enclosure must be less than 3 mm when the actuator is inserted.
- Adjustment by turning hexagonal screw

Rozměry

Omyly a technické změny vyhrazeny.

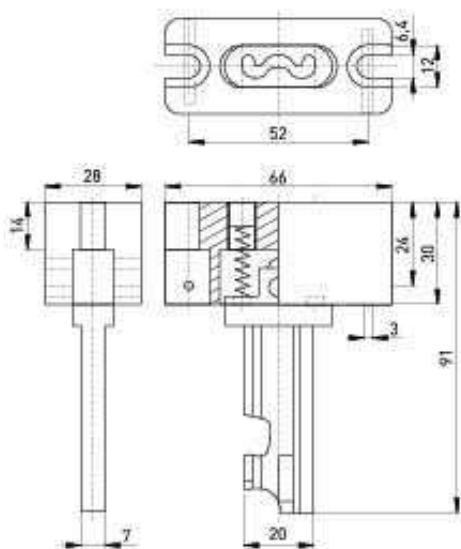


Accessories for solenoid interlocks

Flexible actuator AZM 415-B2

Číslo materiálu: 1171890 (Staré číslo materiálu: 01.08.0176)


Actuating radii

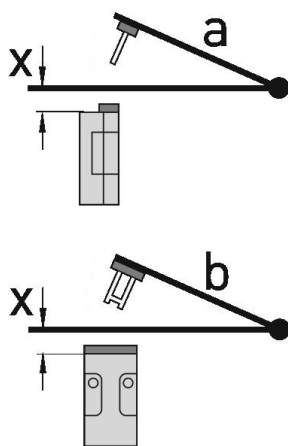

- The axis of the hinge should be x mm above the top edge of the safety switch and in the same plane.
- a Actuating radius to the plane of the actuator
- b Actuating radius in line with the plane of the actuator
- x Axial misalignment

Attention! x must be referred to the surface of the enclosure and not to the inserted actuator!

Distance between actuator/enclosure

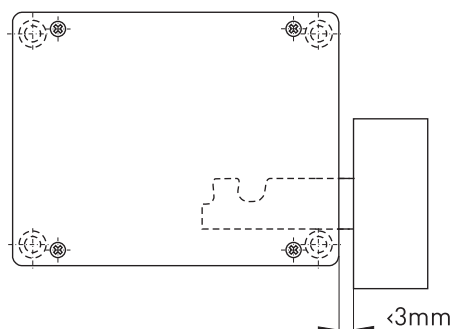

Adjustment

