

## Accessories for solenoid interlocks

### Flexible actuator AZM 415-B3

Číslo materiálu: 1171892 (Staré číslo materiálu: 01.08.0177)

#### Vlastnosti/možnosti


- Especially suitable for sliding and hinged guards
- Actuating radius on hinged guards  $a = 250$  mm
- Axial misalignment  $x = 36$  mm

#### Notes

- The actuator is not included in the delivery of the switches
- Removal of the actuator can be prevented by fitting dowel pins in the holes provided.
- The distance between the flange of the actuator and the switch enclosure must be less than 3 mm when the actuator is inserted.
- Adjustment by turning hexagonal screw

#### Rozměry

Omyly a technické změny vyhrazeny.

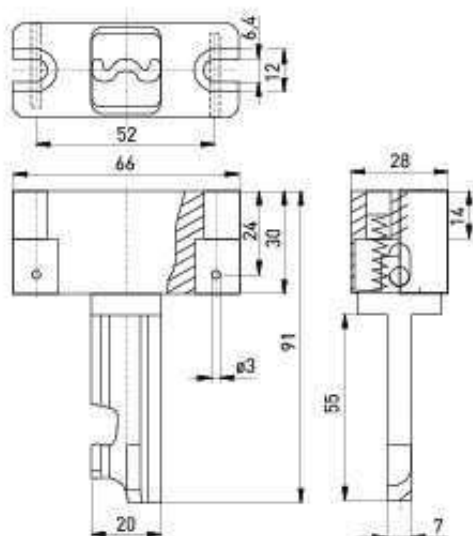


## Accessories for solenoid interlocks

### Flexible actuator AZM 415-B3

Číslo materiálu: 1171892 (Staré číslo materiálu: 01.08.0177)


#### Actuating radii

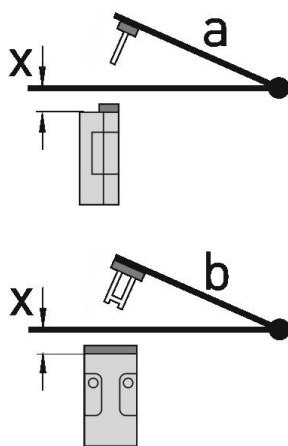

- The axis of the hinge should be x mm above the top edge of the safety switch and in the same plane.
- a Actuating radius to the plane of the actuator
- b Actuating radius in line with the plane of the actuator
- x Axial misalignment

Attention! x must be referred to the surface of the enclosure and not to the inserted actuator!

#### Distance between actuator/enclosure

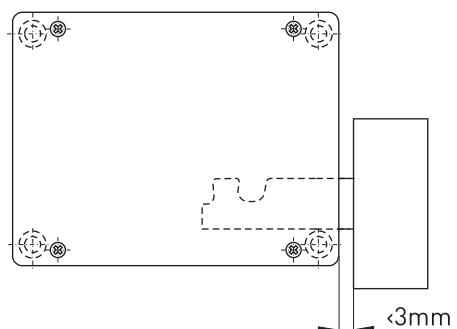

#### Adjustment

