



Position switch ES 95 DD 10/1S


Číslo materiálu: 1050022 (Staré číslo materiálu: 95025001)

Vlastnosti/možnosti

- Thermoplastic enclosure
- Horizontally slotted mounting holes
- Double insulated ☐
- Slow action $\ominus$, change-over contact with double break

- Good resistance to oil and petroleum spirit
- Actuator: Rod lever DD
- Lever angle adjustable in 10° steps
- Actuator can be repositioned by 4 x 90°

Rozměry

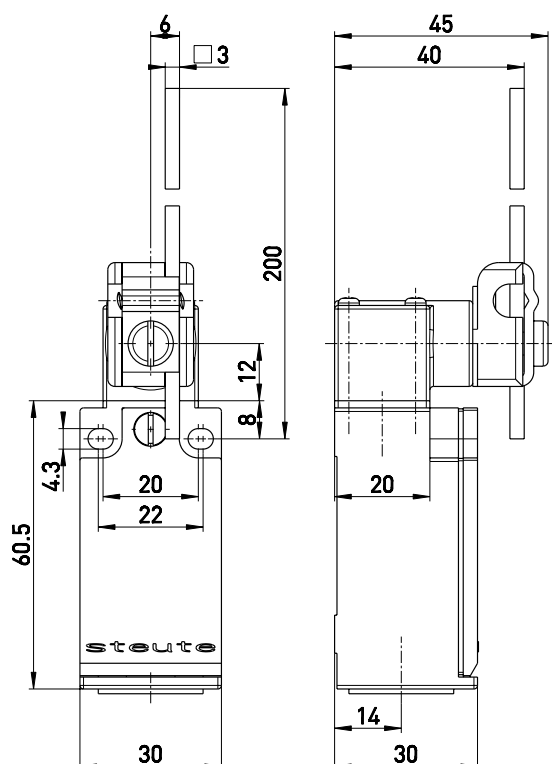


Technická data

Standards	EN 60947-5-1; EN 1088; BG-GS-ET-15
Design	EN 50 047
Enclosure	glass-fibre reinforced, shock-proof thermoplastic, self-extinguishing UL 94-V0
Degree of protection	IP 67 to IEC/EN 60529
Contact material	silver
Switching system	slow action, positive break
Switching elements	NC contacts $\ominus$ to EN 60947-5-1 change-over contact with double break Zb, galvanically separated contact bridges
Connection	screw connection terminals
Cable cross-section	max. 2.5 mm ² (incl. conductor ferrules)
Cable entry	1 x M20 x 1.5
U_{imp}	4 kV
U_i	400 V
I_{the}	6 A
Utilisation category	AC-15; DC-13
I_e/U_e	6 A/400 VAC; 0.25 A/230 VDC
Max. fuse rating	6 A gG/gN fuse
Mechanical life	> 1 million operations
Frequency of operation	1800/h
Ambient temperature	-20 °C ... +80 °C
Contact gap	2 x 3.5 mm
Approvals	
Weight	90 g

Omyly a technické změny vyhrazeny.

Contact diagram



Switching diagram

