



Ex position switch

Ex 13 WHK 1Ö/1S - 2m

Číslo materiálu: 1189153 (Staré číslo materiálu: 13018303)

Vlastnosti/možnosti


- Ex zone 1 and 21
- Thermoplastic enclosure
- Double insulated ☐
- Slow action $\ominus$, change-over contact with double break
- Suitable for in-line mounting
- With pre-wired cable, cable length 2 m
- Actuator: Offset roller lever with collar WHK

Notes

- Actuator can be repositioned by 180° on request
- With plastic roller available on request

- Actuating speed max. 0.5 m/s with a vertical actuating angle of 40°
- Actuation only possible from right-hand side
- Free movement of actuator from left-hand side
- Metal roller
- Watertight collar for protection against penetration of dirt
- N.B.: Please state required approvals for Russia, China, Brazil and North America with your order!

Rozměry

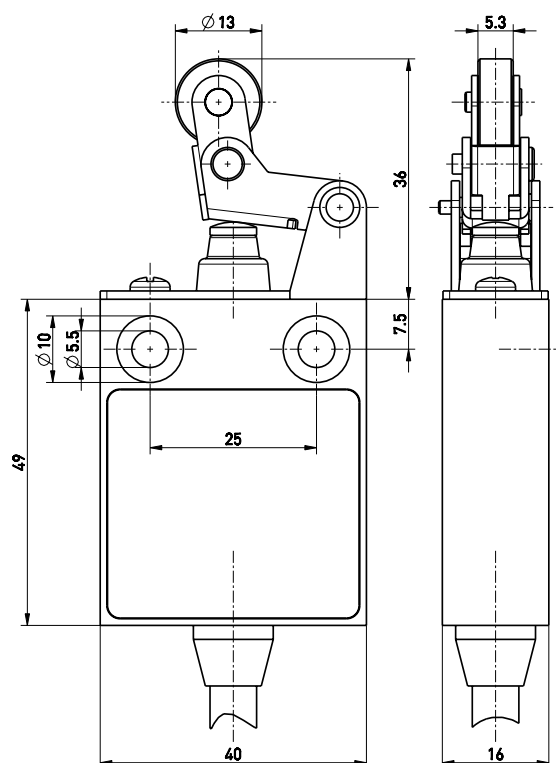


Technická data

Standards	EN 60947-5-1; EN 1088; EN 60079-0, EN 60079-1, EN 60079-31
Enclosure	glass-fibre reinforced, shock-proof thermoplastic, self-extinguishing UL 94-V0
Degree of protection	IP 65 to IEC/EN 60529
Contact material	silver
Switching system	slow action, positive break
Switching elements	NC contacts $\ominus$ change-over contact with double break Zb, galvanically separated contact bridges
Connection	cable H05VV-F, 4 x 0.75 mm ²
U_{imp}	4 kV
U_i	250 V
I_{the}	T6: 6 A, T5: 3 A
I_e/U_e	6 A/250 VAC; 0.25 A/230 VDC
Utilisation category	AC-15; DC-13
Max. fuse rating	6 A gG/gN fuse
Ambient temperature	T6: -20 °C ... +65 °C, T5: -20 °C ... +95 °C
Mechanical life	> 1 million operations
Frequency of operation	1800/h
Repeat accuracy of switching points	± 0.1 mm
Contact gap	max. 2 x 4 mm
Ex marking	II 2G Ex d IIC T6/T5 Gb, II 2D Ex tb IIIC T80 °C/T95 °C Db IP65 IECEx Ex d IIC T6/T5 Gb, Ex tb IIIC T80 °C/T95 °C Db IP65
Approvals	PTB 03 ATEX 1068 X IECEx PTB 06.0053X



Omyly a technické změny vyhrazeny.




Ex position switch

Ex 13 WHK 1Ö/1S - 2m

Číslo materiálu: 1189153 (Staré číslo materiálu: 13018303)

Switching diagram

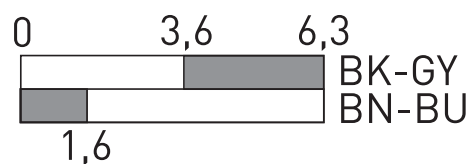

Contact diagram

