



## Bezdrátové ovládací jednotky

RF 95 RT ULR SW868

Číslo materiálu: 1190489 (Staré číslo materiálu: 95955008)

### Vlastnosti/možnosti


- Thermoplastic enclosure
- Mounting details to EN 50047
- sWave® wireless technology
- No power supply, no wiring and pipe laying required

- Easy programming of receiver
- Output signal can be individually configured at the receiver
- Actuator: Push-button RT
- Actuator made of plastic

### Note

- With stainless steel actuator available on request

### Rozměry

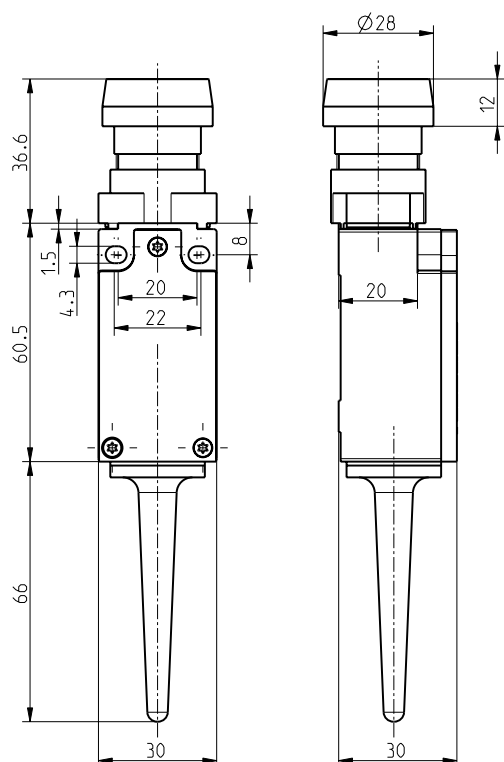

### Technická data

|                      |                                                                                          |
|----------------------|------------------------------------------------------------------------------------------|
| Standards            | EN 60947-5-1; EN 61000-6-2;<br>EN 301 489-1; EN 301 489-3;<br>EN 300 220-1, EN 300 220-2 |
| Enclosure            | glass-fibre reinforced,<br>shock-proof thermoplastic,<br>self-extinguishing UL 94-V0     |
| Cover                | Glass-fibre reinforced,<br>shock-proof thermoplastic,<br>self-extinguishing UL 94-V0     |
| Tightening torque    | max. 1.2 ... 1.3 Nm                                                                      |
| Degree of protection | IP 65 to IEC/EN 60529                                                                    |
| Protocol             | sWave®                                                                                   |
| Ambient temperature  | -20 °C ... +65 °C                                                                        |
| Switching frequency  | approx. 12000 telegrams at<br>repetitions/h                                              |
| Voltage supply       | Electrodynamic energy generator                                                          |
| Frequency            | 868.3 MHz                                                                                |
| Transmission power   | < 25 mW                                                                                  |
| Data rate            | 66 kbps                                                                                  |
| Channel bandwidth    | 266 kHz                                                                                  |
| Sensing range        | max. 700 m outside,<br>max. 50 m inside                                                  |
| Mechanical life      | > 1 million operations                                                                   |
| Actuating time       | min. 80 ms                                                                               |

Omyly a technické změny vyhrazeny.