



Pull-wire switch


EM 61 Z 10/1S

Material number: 1047911 (Material number old: 61141001)

Features/Options

- Metal enclosure
- Version for wall mounting with mounting angle
- Snap action: 2 contacts
- Pull-wire function

Dimensions

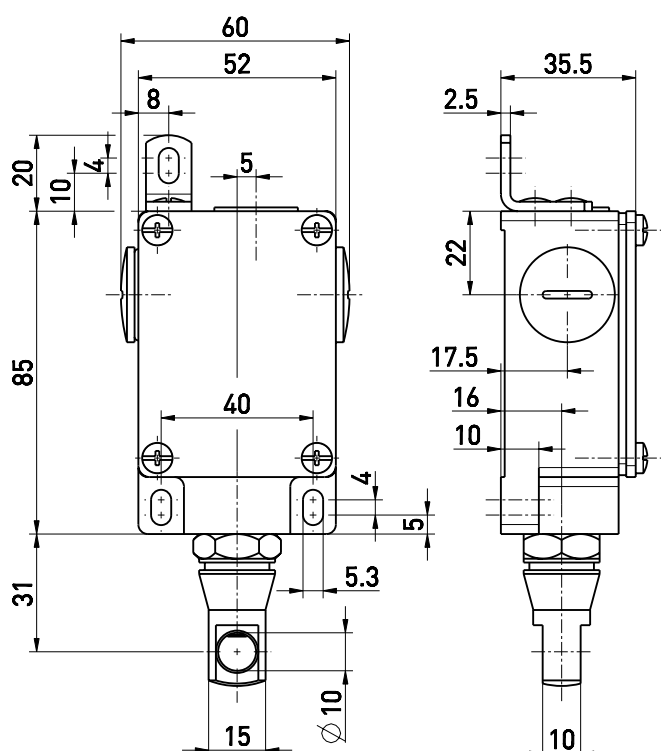


Technical data

Standards	EN 60947-5-1
Enclosure	aluminium die-cast, powder-coated steel, powder-coated
Cover	IP 65 to IEC/EN 60529
Degree of protection	silver
Contact material	change-over contact with double break, galvanically separated contact bridges
Switching elements	snap action
Switching system	screw connection terminals
Connection	max. 2.5 mm ² (incl. conductor ferrules)
Cable cross-section	3 x M20 x 1.5
Cable entry	6 kV
U_{imp}	400 V
U_i	10 A
I_{the}	AC-15
Utilisation category	6 A/400 VAC
I_e/U_e	6 A gG/gN fuse
Max. fuse rating	-20 °C ... +80 °C
Ambient temperature	> 1 million operations
Mechanical life	3600/h
Operation cycles	max. 50 N
Actuating force	pull-wire function
Features	
Approvals	
Weight	326 g

Errors and omissions excepted.

Contact diagram



Switching diagram

